


Deck-Armor™ Premium Breathable Roof Deck Protection

Help protect your home and roof system from damaging moisture with breathable roof deck protection



- Helps reduce inside moisture that can become trapped in the roofing system, which can cause mold, mildew, and expensive structural damage
- Provides a critical layer of extra protection between your shingles and roof deck to resist wind-driven rain (or moisture from other sources) that can cause damage to your roof structure
- Avoids wrinkling and buckling for a better-looking finished roof


Deck-Armor™ Premium Breathable Roof Deck Protection

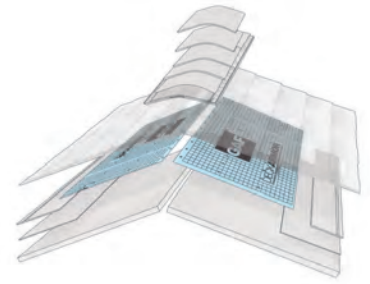


Benefits:

- **Breathable technology helps reduce common inside moisture** (from cooking, bathing, cleaning, etc.) that can become trapped within your roofing system, causing rot or other costly damage
- **Premium non-asphaltic, polypropylene construction** provides long-lasting protection
- **Specially designed surface provides enhanced walkability** versus conventional felts
- **At least 600% (i.e., 7 times) greater tear strength¹** and 214% higher nail-pull strength² than conventional #30 asphalt felt
- **48"-wide (1.22 m) roll provides 33% more coverage per course than conventional 36"-wide (914 mm) asphalt felts**
- **Light-blue surface is cooler to work on in hot weather** than conventional black felts
- **Eligible for up to a Lifetime[†] limited warranty.** It's also an eligible accessory product in the Roof Deck Protection category of GAF residential enhanced warranties.

GAF recommends the use of roof deck protection that helps reduce moisture that can be trapped under the roof's shingles!

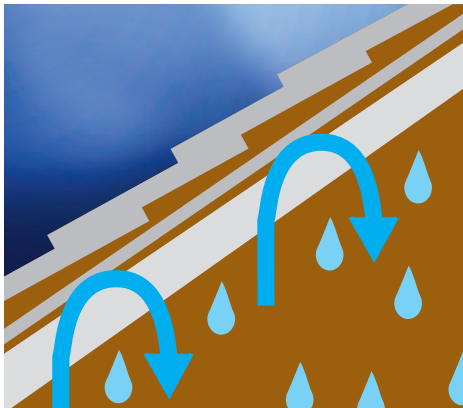

Typical
"Non-breathable" synthetic underlayments can trap harmful moisture

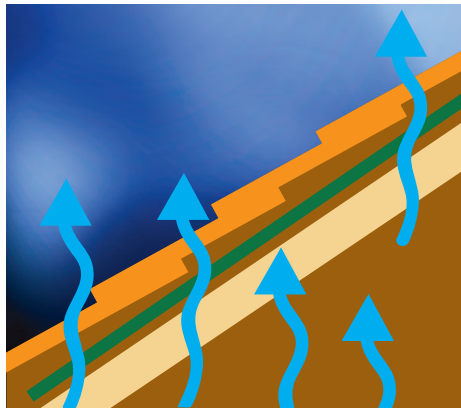

Deck-Armor™
Allows excess moisture in the roof system to escape

Product Details:

Nominal Specifications:

For use with asphaltic shingles and may also be used with slate, wood, metal, or tile³

- **Roll size:** 10 squares (1,000 sq. ft. [92.9 m²]) (excludes laps)
- **Roll width:** 48" (1.22 m)
- **Roll length:** 250' (76.2 m)
- **Approx. roll weight:** 43 lb. (19.5 kg)
- **UV exposure:** UV-stabilized polypropylene construction resists UV degradation for up to 180 days⁴

Code Approvals and Standards:

- Meets or exceeds ASTM D8257
- Meets or exceeds the physical requirements of ASTM D226 Type II and D4869 Type IV
- Meets or exceeds ICC Acceptance Criteria AC188
- ICC-ES Evaluation Report (ESR-2808)
- Miami-Dade County Product Control approved
- State of Florida approved
- Component of a UL Listed ANSI/UL 790 Class A system when used with UL Class A shingles⁵
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment

Deck-Armor™ Roof Deck Protection "out-breathes" typical underlayments

| | |
|---------------------------------|---------------------------------------|
| Deck-Armor™ | 16 Perms* |
| #15 asphalt felt | 6 Perms* |
| #30 asphalt felt | 5 Perms* |
| Typical synthetic underlayments | .05 Perms* (virtually non-breathable) |

* Nominal MVTR perms value as measured by GAF on Mocon unit @ 82°F (28°C) and 50% R.H.

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

² GAF trapezoidal tear strength testing per ASTM D4533.

³ GAF nail pull-through testing per ASTM D3462.

⁴ Contact GAF Technical Support at 877-GAF-ROOF for acceptable non-asphaltic roofing systems and limited warranty coverage.

⁵ 180-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is NOT related to withstanding water, snow, or wind. While Deck-Armor™ Premium Breathable Roof Deck Protection is water resistant, it is NOT WATERPROOF. DO NOT USE Deck-Armor™ Premium Breathable Roof Deck Protection as a temporary roof to protect property or possessions.

⁶ Refer to UL Online Certification Directory for actual assemblies

Note: Always use plastic cap nails or staples with plastic caps to install Deck-Armor™ Premium Breathable Roof Deck Protection. Do NOT use nails or staples without caps.



To learn more about the Lifetime[†] Roofing System visit gaf.com/Lifetime



We protect what matters most™

